

LÄTTBET skruv P

Adjufix

The Original System Solution

AERATED CONCRETE AND HOLLOW BRICK SCREW WITH PLUG





Aerated concrete and hollow brick screw with plug.
For window and door frame mounting.

08-2021

Safety factor: 5










Mounting guide

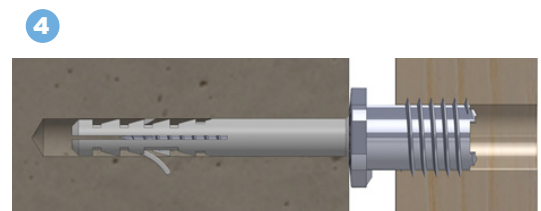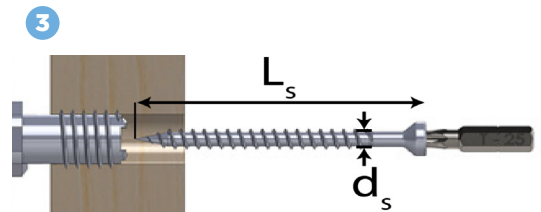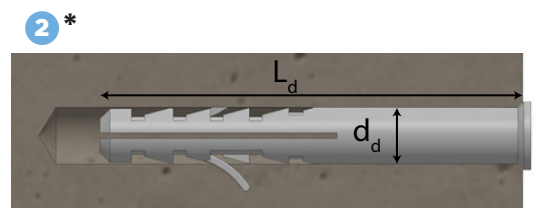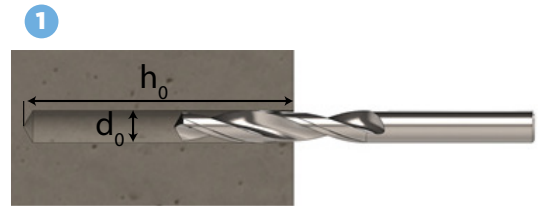

Used in

Load-bearing capacity

For aerated concrete 500 kg/m³

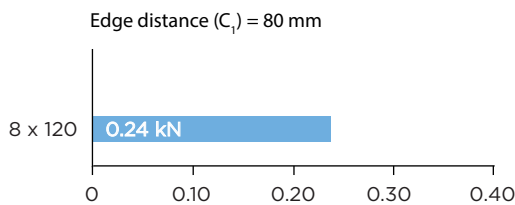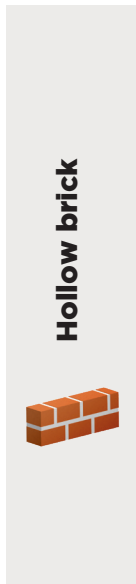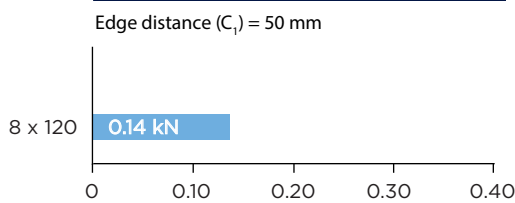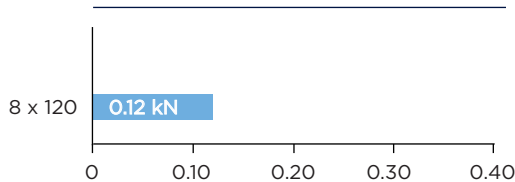

Sleeve dimension [mm]	Drilling depth [mm]	Drill diameter [mm]	Minimum edge distance [mm]	Tensile load capacity [kN]	Shear load capacity at $c_1=50\text{mm}$ [kN]	Shear load capacity at $c_1=80\text{mm}$ [kN]	Screw dimensions [mm]	ITW number
$d_d \times L_d$	h_0	d_0	c_1	N_{RK}	V_{RK}	V_{RK}	$d_s \times L_s$	
8 x 120	125	8	50	0.12	0.14	0.24	6 x 125	120113

* Make sure to thoroughly clean the drilled hole before mounting the sleeve