

LED STRIPS Product instructions

APPLIES TO THE FOLLOWING FIBROTECH LED STRIPS:

DoP	Product and color	Dimensions
2428319-2025	4 pcs LED light strips for acoustic panels 1.000 mm including remote control	9,5 x 12,5 x 1000 mm
2428330-2025	4 pcs LED light strips for acoustic panels 2.400 mm including remote control	9,5 x 12,5 x 2400 mm
2428335-2025	4 pcs LED light strips for acoustic panels 3.000 mm including remote control	9,5 x 12,5 x 3000 mm




To ensure your experience, please read the instructions carefully first. (Special instructions). Please charge the battery before using it for the first time.

PRODUCT LIST

This package includes: Lamp Body, USB Charging Cable, Magnetic Tape and Remote Control
(Note): The number of magnetic plates is the same as the number of magnets in the lamp body, which may be different in length.

FUNCTIONAL DESCRIPTION

Button Type	Functional description
	Initially off: Short Press the lamp body switch key to enter the first light mode (For the first time in constant light mode, the remote control has not been matched) Short Press lamp body switch key 2 to enter off mode.
	Long Press 1 to enter the light mode, then press the remote control to turn on the light button once (light body flashes twice, indicating successful pairin) Long Press 1 to enter the light mode, then press the remote control to turn on the light button once (light flashes three times, indicating successful decoding)

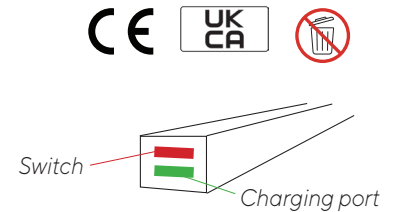

Estimated burn time for the the LED Strips is 5-6 hours. However, no guarantee.

ENDURANCE INSTRUCTIONS

- 1: The duration of the lamp after a single full charge varies with personal use needs the longer the light is turned on every day, the greater the power consumption.
- 2: In the case of no artificial brightness adjustment, the brightness of the lamp will decrease with the lower power, when the brightness is low, please charge in time to avoid affect normal use.

INSTALLATION DESCRIPTION



1: Use a cleaning cloth to clean the surface of the base position and make sure the surface is dry.



2: Place the pilot disk on the lamp body and move it on the back to find the position of the built-in magnet.




3: After tearing off the phosphorus, adhesive paper, stick it to the target position.



4: Installation completed, the lamp body adsorption on the metal surface, can be taken off and fixed at will.

Installation Considerations: 1: The magnetic tape has two faces, one face is the metal face, one face is the paste face. 2: The correct installation method for the magnetic tape adhesive surface to the wall cabinet surface, and the lamp will be adsorbed to the wood, metal and other smooth surface. (please do not stick the tape to the lamp body) 3: The number of magnetic plates is the same as the amount of iron-contact in the lamp body, and the length may be different.

HOW TO USE THE REMOTE CONTROL

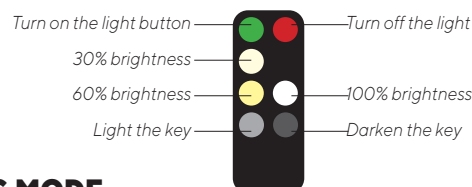

WIRELESS REMOTE CONTROL MATCHING MODE

- 1: Turn off the light first, then press 1 to enter the light mode, then press the turn on light button once (light body flash 2, for success)
- 2: Turn off the light first, then press 1 to enter the light mode, then press the turn on light button once (the light body flashes 3 times for successful decoding)

PARAMETER

Power (P): 6.4W/meter
Brightness: 45 lumens/meter
Color Temperature: 2965 Kelvin
Color Rendering Index: CRI>92
Dimmable: 30% 60% 100%
Number of LEDs: 420/meter

Ingress Protection Rating: IP20
Voltage (U): Light strip 5V DC
Product Color: Black aluminum strip with black cover
Material: COB strip and aluminum profile with acrylic cover
Cutting LED strips: It is NOT possible to cut the LED strip to the desired length
Warranty: 18 months