

Wood burning heater Harvia Pro 20 ES black

WKP200ES

The Harvia 20 RS Pro stove is a popular choice for cottage saunas thanks to its practicality. The right side of the stove features a fixed and easy-to-use 20-litre water tank that heats up the water while the stove is being heated for bathing.



Features

Net weight (kg) : 70.0

H x W x D : 760.0 x 430.0 x 650.0 mm

Stone amount (kg) : 40.0

ID	GTIN	Power	Sauna room size min - max m3
WKP200ES	6410082666867	24.1 kW	8.0-20.0



Spare parts

Product	ID	Pcs
Ashpan ES/SL	Z2ES-125	
Furnace grate	ZKIP-10	1
Connection pipe	ZKIP-130	1
Glass for stove door 184*210 mm	ZTS-36	
Hinge pin	ZKIP-50	1
	Z2ES-1	1
	Z2ES-221	1
Harvia mark	ZH1-170	
Handle for ash box	ZKIP-680	
Stove door with glass	ZROST-048	
Water container lid 20 ES (2019-)	ZES-146	1
Faucet set	ZVS-110	
	ZKIP-155	
Grill ES Welded 2019	SPZ2ES-221	
Adjustable legs for LG150/SL	SPZKIP-918	
Nut R1/2 25mm	SPZES-250	
Hinge pin, long	SP675	
Extension 25 mm hot water faucet	SPZES-240	
Spare part, latching pin	SP674	
Cap for smoke hole (Ø 50 mm)	SPZKIP-170	
Water container 20 ES, stainless steel	SP035	
Air guides set Green Flame 20	SP678	
Gasket for hot water faucet	SPZES-260	
Handle for door Legend GF	SP687	
Cast-iron grating 135x290mm, sauna heaters	SPZKIP-10	
Ash box, 20 ES/SL,ESGF	SP681	
Water container lid 20 ES (2019-)	ZES-146	

Technical details

Technical data	Type / attribute	WKP200ES
	Color	Black
	Power output	24.1 kW
	Stone amount (kg)	40
Dimensions	Product width	430
	Product height	760
	Product depth (mm)	650
	Net weight (kg)	70
	Gross weight	70.4
	Package width	515
	Package height	800
	Package depth	745
Connections	Flue connection locations	Back, Top
	Chimney connection diameter	115
Safety and installation dimensions	Safety distance front (non-combustible materials)	300




Technical details

Technical data	Type / attribute	WKP200ES
	Safety distance front (combustible materials)	300
	Safety distance right side (combustible materials)	300
	Safety distance right side non-combustible materials	100
	Safety distance left side (combustible materials)	300
	Safety distance left side non-combustible materials	100
	Safety distance behind (non-combustible materials)	100
	Safety distance behind (combustible materials)	300
	Safety distance (Ceiling)	1300
	Room min. height(depends on connections and therefore from output, star/delta)	2060

Technical images

1.1. Stove Parts


- A. Upper connection opening
- B. Rear connection opening
- C. Soot opening
- D. Stove door
- E. Ash box

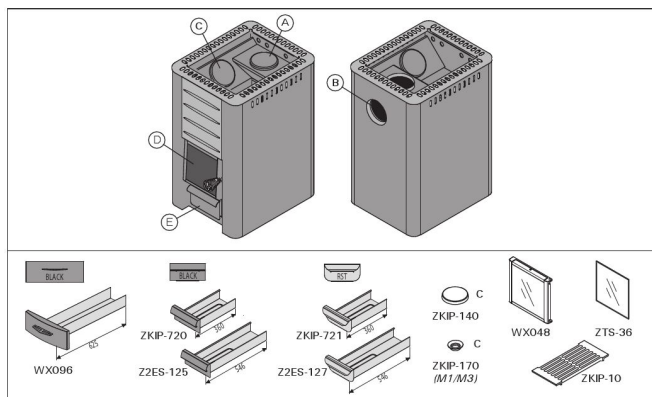

Stove parts. Note! Only use replacement parts recommended by the manufacturer. Unauthorised modification of the stove is prohibited.


3.4. Accessories

- A. **Harvia steel chimney WHP1500.**
- B. **Harvia heater VL221.** Installed on the top of the upper connection opening. When a protective sheath or other protection is used that is not large enough to protect the inflammable material and the stove, the protection of the radiation of the pipe between the water heater and smoke flue, you must install a radiation cover around the pipe.
- C. **Radiation cover WZ0201130.** Installed around the smoke pipe.
- D. **Harvia protective sheath WX017.**
- E. **Harvia protective sheath WL400–WL775.**
- F. **Harvia protective bending WX018, WL100.** (not for models 20 RS/LS Pro, 36, 36 Duo, Premium VS, Linear 22 RS/LS, 22 RS/LS S).
- G. **Harvia protective bending WL110** (not for models ES Pro S, ES Pro S, 22 ES S).
- H. **Angle smoke pipe.** Different models
- I. **Lead-through flange for smoke pipe WZ020115.** Covers the edges of the flue opening and the sealing in the wall. Made of stainless steel. Consists of two parts to make it useable with differently inclined smoke pipes.
- J. **Radius WZ011115.** Connected to the flue opening, does not require other seals. The inner side already has a seal.

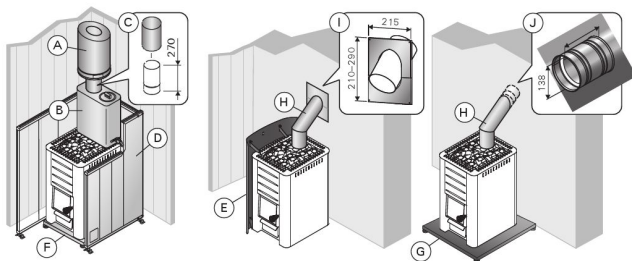


Accessories (all dimensions in millimeters)

	A min.	B min.	C min.	D min.
M1, M2, M3 SL, Classic 140	1200	250	300	300
20 Pro, 20 SL Duo, 20 ES Pro, 20 SL Boiler, Premium V/S, Classic 220 Duo, 20 RS LS Pro	1300	300	300	300
26 Pro, Classic 280	1280	375	375	375
36, 36 Duo	1250	500	500	500
Linear 16, 16	1300	300	350	400
Linear 22, 22 S, Linear 22 RS LS ES, 22 RS LS ES	1265	400	380	500
Linear 28	1380	400	400	500

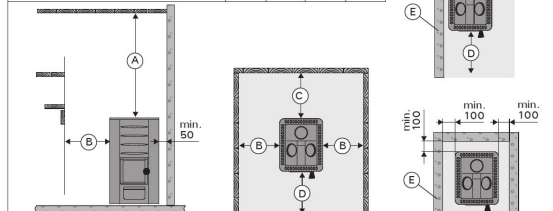

Safety distances (all dimensions in millimeters).

WX017	B min
M1, M2, M3/SL, 20 Pro, 20 SL Duo, 20 ES Pro/S, 20 Boiler, 20 SL Boiler, Premium, Classic 140 SL, Classic 220 Duo	300
26 Pro, Classic 280	375
Linear 16, 16	300
Linear 22/28, Linear 22 ES, 22 ES S, 22 S	400

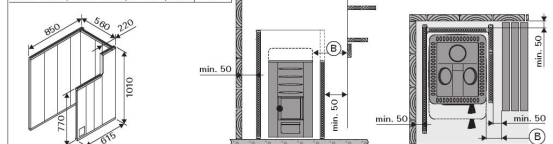

		B min	C min	D min	F	
WL400/WL450	M1, M2, M3-SL 20 Pro SL Duo	50	50	300	30	
WL500/WL550	20 Boiler 30 SL Boiler	62	62	422	30	
WL600/WL650	20 ES Pro-S					
WL700/WL750	26 Pro	73	73	526	30	
WL800/WL850	30, 38 Duo	80	80	700	30	
WL900/WL950	20 ES Pro-S 22 RS SL Duo	62	62	422	30	
WL425/WL475	Linear 16, 16	30	30	400	32	
WL525/WL575	Linear 22, 22					
WL525/WL585	Linear 22, RS SL 22 RS SL S	70	70	500	40	
WL525/WL595	Linear 22 ES, 22 22 ES S					
WL326/WL336						

Safety distances with protective sheath (all dimensions in millimeters)