


TipTest Duo Set






Phase tester for quickly checking the L-conductor at electrical connections

Rev.0116

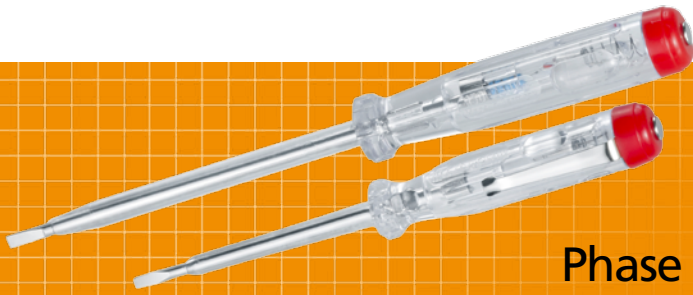

- **Reliable and fast** phase testing
- Locates the **L-conductor** in electrical installations
- Can be used for measurements at EU-standard sockets
- **Simple to use and well-proven** testing aid
- **Compact design** with convenient clip, practical for shirt pockets and tool boxes
- High quality, sturdy **VDE GS tested design**
- Two phase testers of different lengths

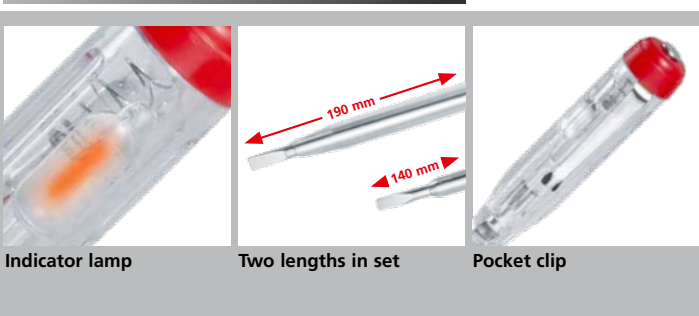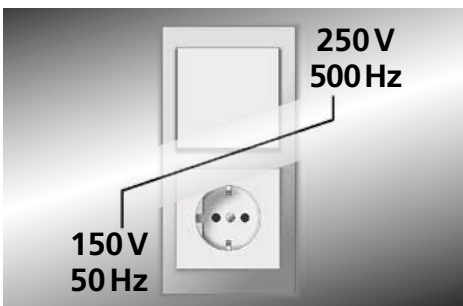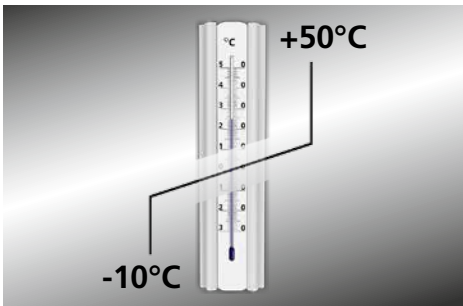

ARTICLE	ARTICLE NO	EAN-CODE	PU
TipTest Duo set	083.009A	4 021563 695645	5



TECHNICAL DATA	
VOLTAGE RANGE	150 - 250 V
FREQUENCY RANGE	50 - 500 Hz
INDICATOR	Indicator lamp
POLLUTION DEGREE 2	
HUMIDITY	Max. 80% relative air humidity (no condensation)
DEGREE OF PROTECTION	IP20
STORAGE TEMPERATURE	-10°C ... 70°C
OPERATING TEMPERATURE	-10°C ... 50°C
DIMENSIONS (W x H x D)	Short phase tester: 16 x 140 x 18 mm Long phase tester: 18 x 190 x 18 mm
WEIGHT	Short phase tester: 18 g Long phase tester: 29 g



TipTest Duo set
- 2 phase testers

Packing dimension (W X H X D)
65 mm x 240 mm x 20 mm