

BENCH DRILL



- 5 speeds for timber, metal and all conventional plastics
- Drill chuck capacity from 1.5 to 13 mm
- Robust cast iron construction
- High-performance 550 W motor
- Integrated laser for precise drilling results
- 405 mm max. distance between chuck and frame foot
- 305 mm max. distance between chuck and table
- Stable 208 x 341 mm base plate
- Drilling table can be angled from 45° to + -45°
- Includes vice



5 speed selections



INCLUDED

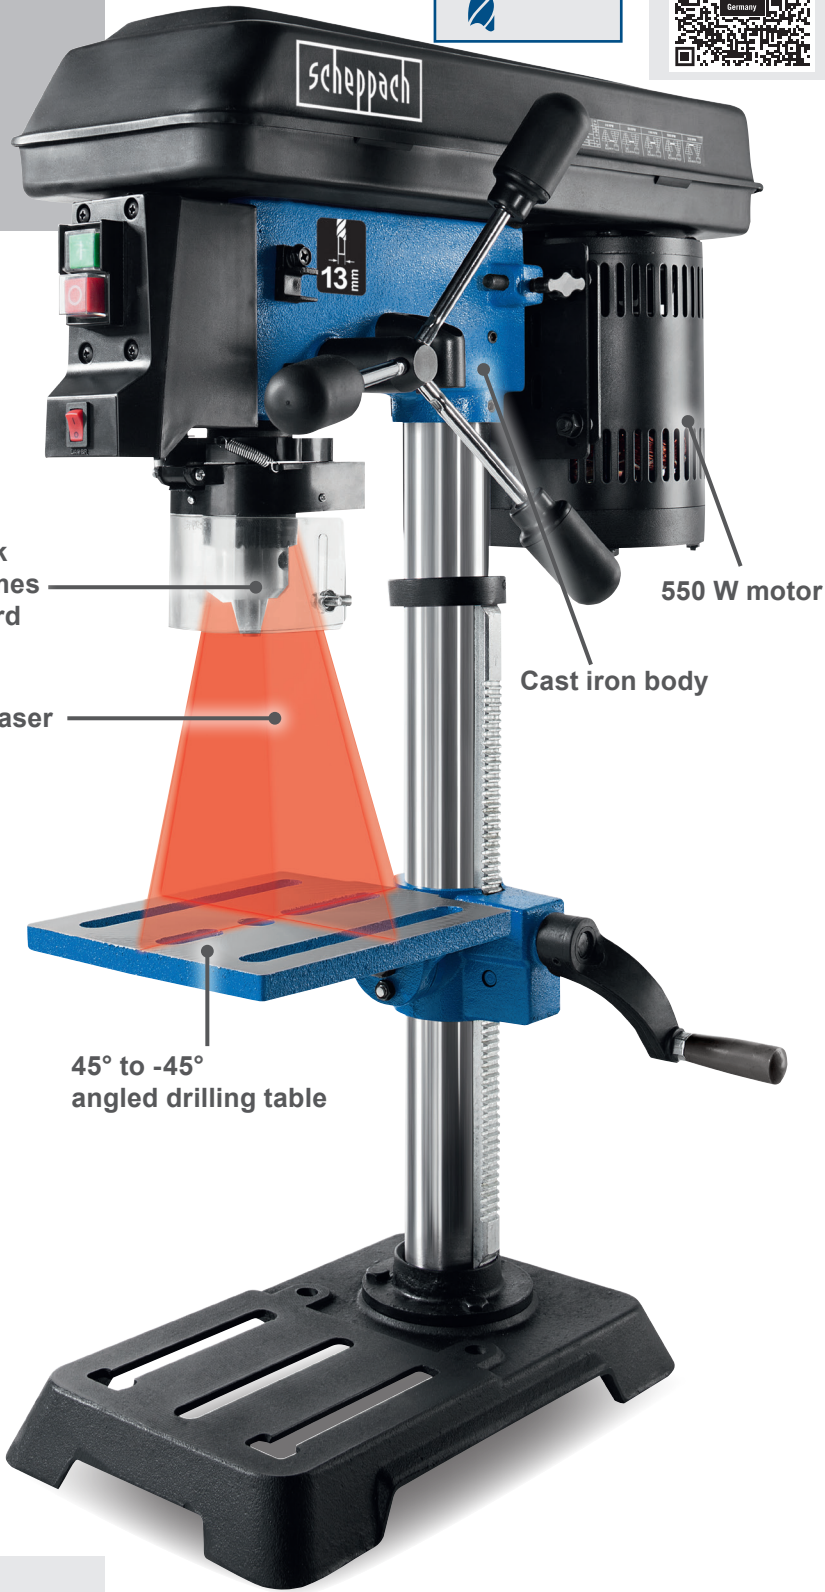

Quick-lock chuck comes as standard

Laser

Cast iron body

550 W motor

45° to -45° angled drilling table

SPECIFICATIONS


Dimensions L x W x H	490 x 220 x 735 mm
Table size	194 x 165 mm
Table tilt	45° – 0 – 45°
Speed range	510 – 2430 rpm
Chuck capacity	1.5 – 13 mm
Max. chuck to table	305 mm
Max. chuck to base	405 mm
Motor	230 V~
Engine power	550 W

LOGISTICAL DATA


Weight net / gross	22 / 24 kg
Packaging dimensions	605 x 390 x 305 mm
Article number	4906807901
Barcode	4046664036432
20 Container	378 pcs
40 Container	790 pcs
40 HQ Container	872 pcs




EXAMPLES OF USE  
SUITABLE FOR PRECISE DRILLING IN

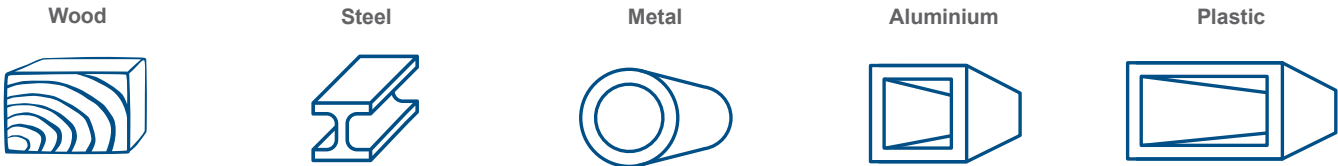

The emergency stop switch guarantees a high degree of safety when needed.

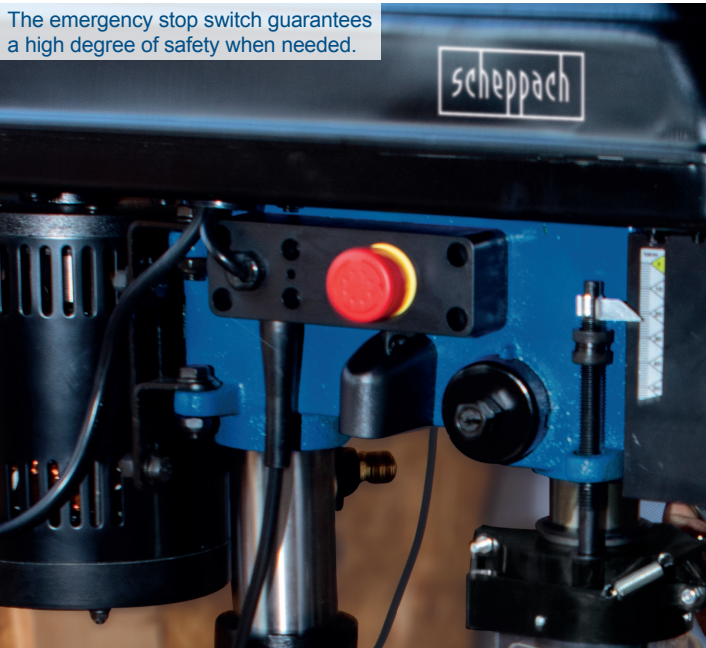

The outreach of 105 mm allows a wide range of uses.

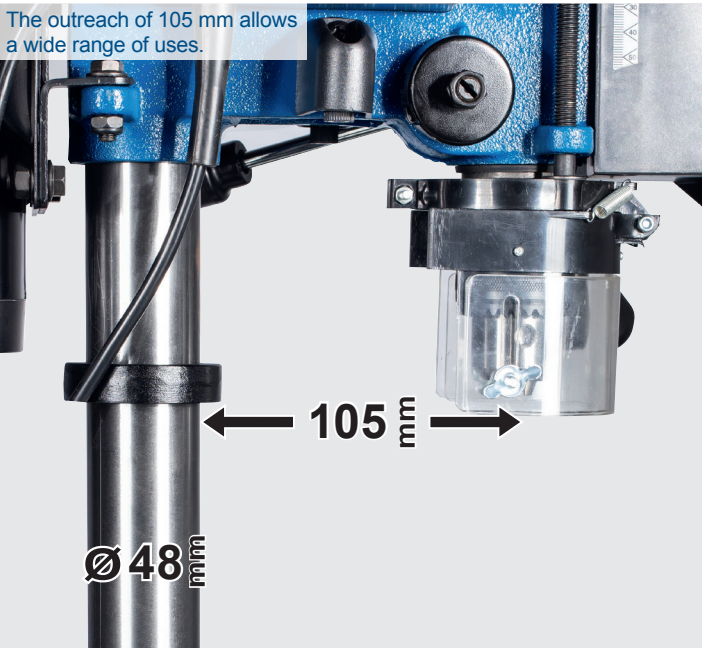

PRODUCT DETAILS

Ergonomic handle



Precision laser



Variable speed 510 – 2430 rpm can be adjusted in 5 steps



Belt drive



Drilling table can be adjusted from +45° to -45°



Chuck capacity 1.5 – 13 mm



Heavy weight ensures sturdy positioning



Powerful 550 W motor




The tried-and-tested gearing principle using the chuck key guarantees high clamping force.

DP16SL

Traditional manufacturers



Precise working thanks to the cross-line laser.

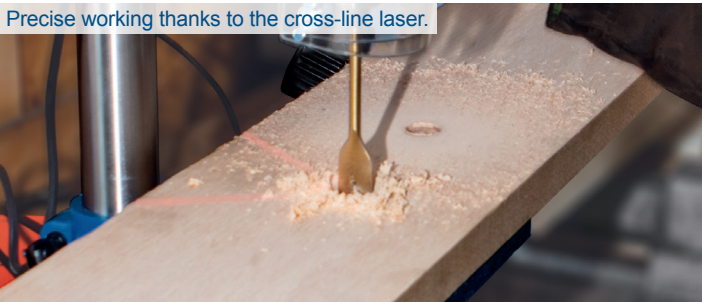

The chuck guard increases work safety.

