

## Mounting the outboard engine

**WARNING!** Read these instructions to ensure safe mounting of the outboard engine


Note: it is possible to use the outboard trolley as a single person.

The TX-65 outboard motor trolley is ready for mounting an outboard engine after being fully assembled and set up for your outboard engine. To mount an outboard engine onto the trolley, please read the following steps carefully.


Make sure that:

- the wheels are set to the maximum width and the knobs are turned tight
- the tube with the bracket is down so that the bracket rests on the frame
- the knob of the horizontal tube is tight


Step 1: Lift the outboard engine about 10 cm high and place the tail of the outboard engine in the tail-support. Use 2 hands!

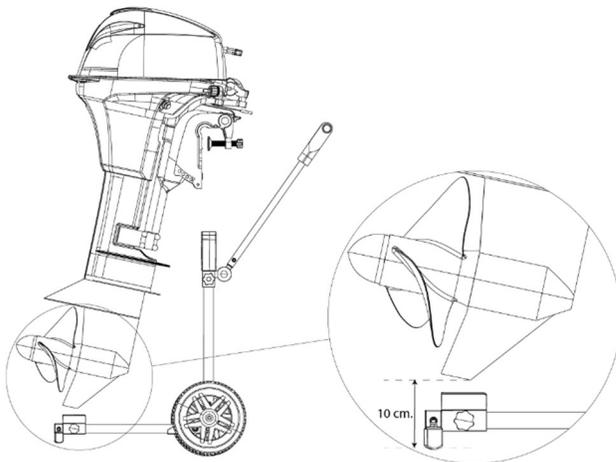


Step 2: Tilt the outboard engine so that it is straight above the bracket.

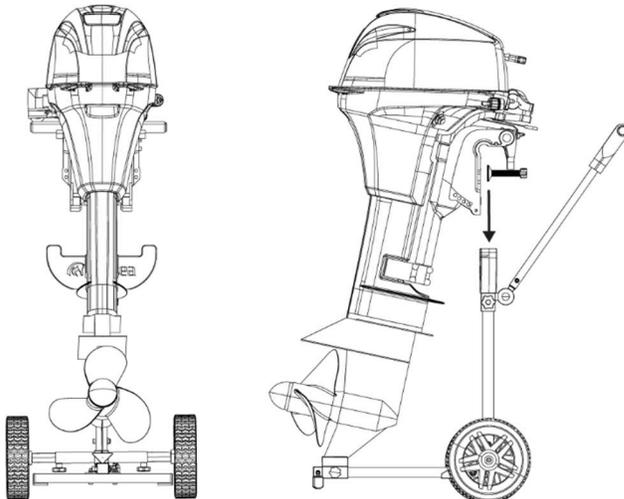


Step 3: Hold the engine with 1 hand. With the other hand lift the trolley bracket until it cannot go any higher.

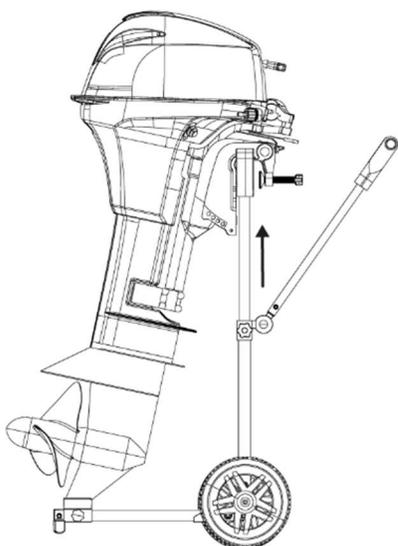


Step 4: Tighten the knob of the tube with the bracket to fix it in position.

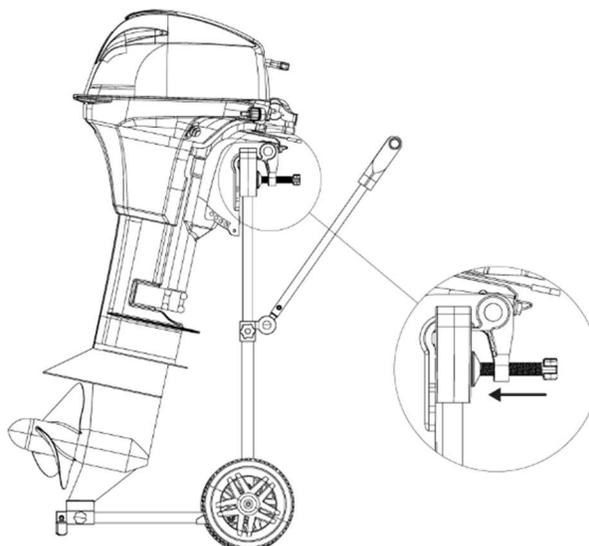

Step 5: Hand tighten the clamp screws of the outboard engine to the trolley bracket.

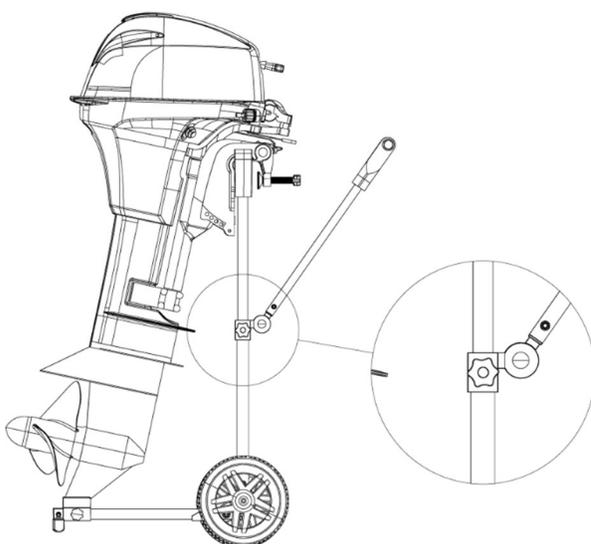

Step 6: Adjust the handle to your desired height.

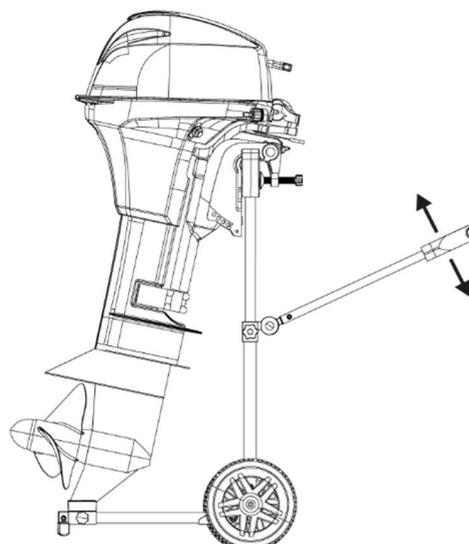

Now your outboard trolley is ready to go!