

LÄTTBET skruv

Adjufix

The Original System Solution

AERATED CONCRETE AND HOLLOW BRICK SCREW


Aerated concrete and hollow brick screw.
For window and door frame mounting.

08-2021

Safety factor: 5



Mounting guide

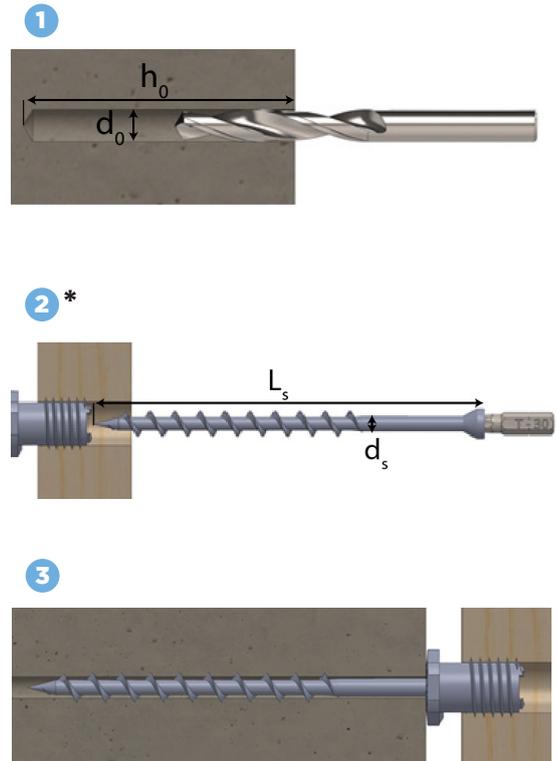


Used in

Load-bearing capacity


For aerated concrete 500 kg/m³



Aerated concrete

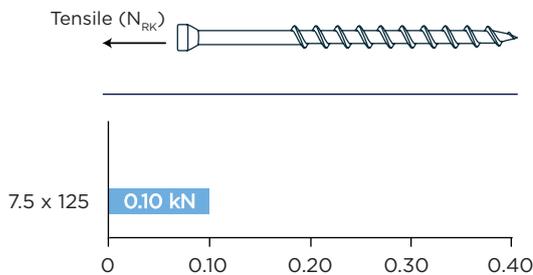

Hollow brick

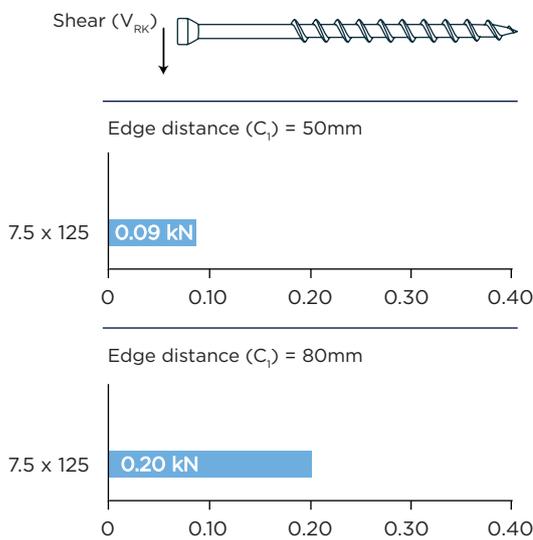

Screw dimension [mm]	Drilling depth [mm]	Drill diameter [mm]	Minimum edge distance [mm]	Tensile load capacity [kN]	Shear load capacity at $c_1=50\text{mm}$ [kN]	Shear load capacity at $c_1=80\text{mm}$ [kN]	ITW number
$d_s \times L_s$	h_0	d_0	c_1	N_{RK}	V_{RK}	V_{RK}	
7.5 x 125	120	6	50	0.10	0.09	0.20	120458

* Make sure to thoroughly clean the drilled hole before mounting the screw