


3IN1

- ✓ Plunge saw
- ✓ Hand held circular saw
- ✓ Panel sizing saw



8" PROFESSIONAL PLUNGE SAW SET

- Powerful, thanks to 1600 W motor
- Guide rail allows parallel penetration of the saw blade and uniform guidance of the saw
- Saw blade with 24 teeth guarantees a very clean cross section with minimal breakout for laminate
- Efficient extraction of sawdust, thanks to saw blade enclosed by guard
- A cutting depth of 75 mm makes cutting and adjustment of most door thicknesses easier
- Suitable for different materials such as solid wood, work tops, MDF panels coated on both sides, laminate etc.
- The best cutting results even without guide rail
- Perfect shadow gaps of 16 mm
- Precise cuts in worktops, solid wood, laminate and plastic
- Handling and weight distribution recommended by tradesmen
- Includes 1400 mm guide rail, rail connector and tilt protection

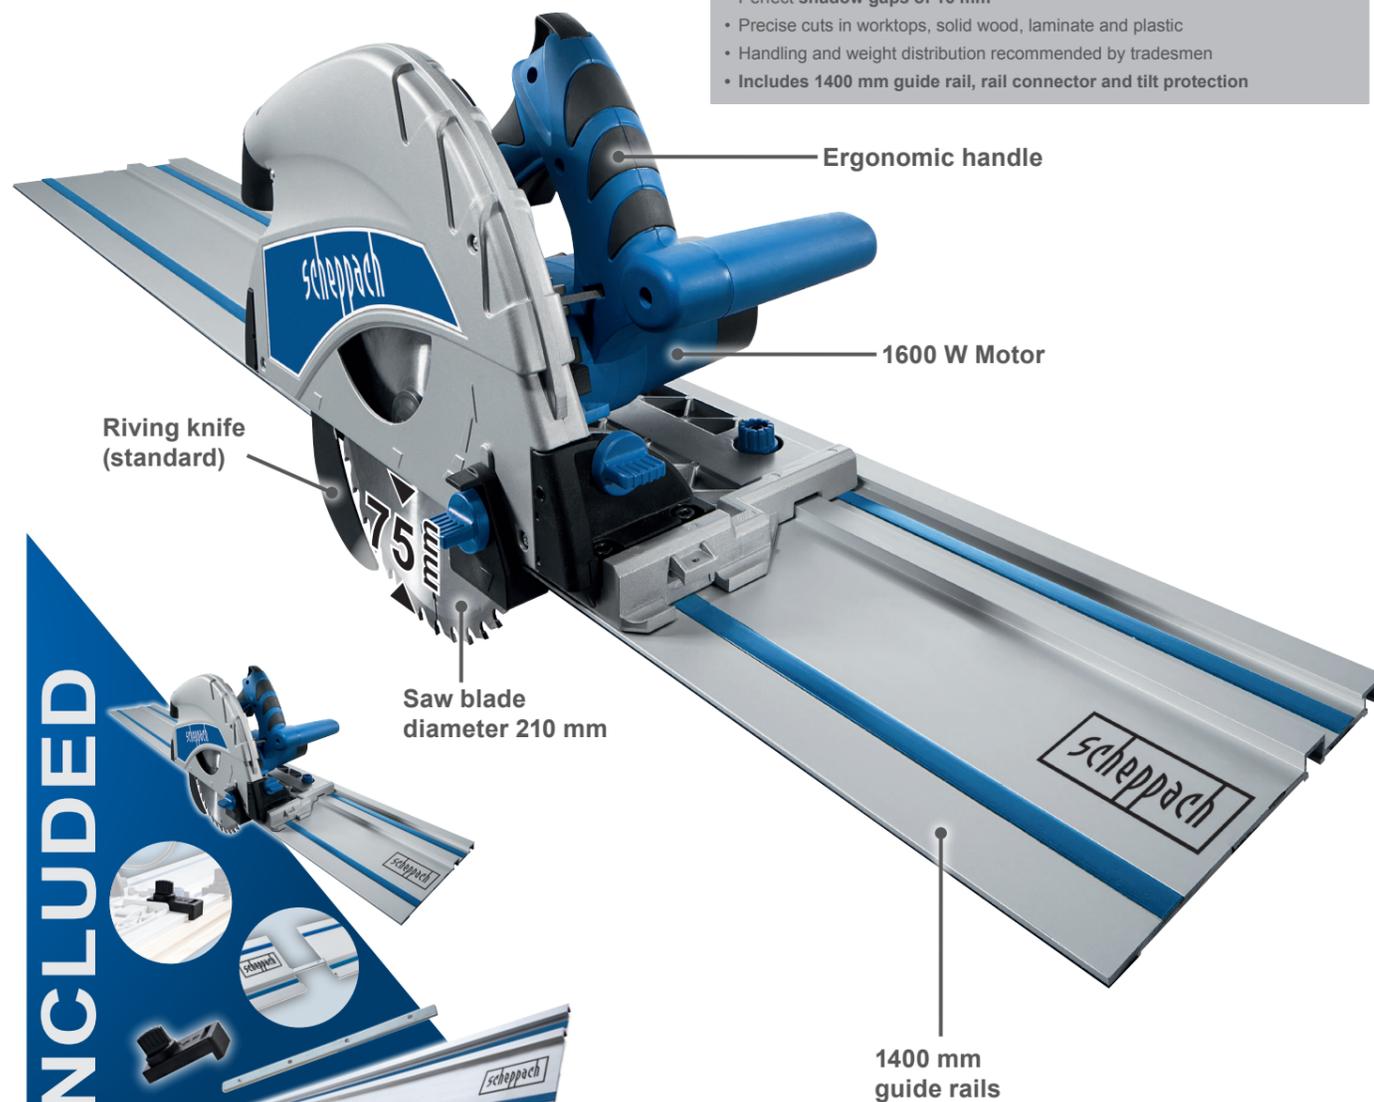

INCLUDED

LOGISTICAL DATA

Weight net / gross	6.9 / 7.6 kg
Packaging dimensions	430 x 240 x 315 mm
Article number	5901804901-901
Barcode	4046664042396
20 Container	810 pcs (670 pcs with 1400 mm rail)
40 Container	1680 pcs (1350 pcs with 1400 mm rail)
40 HQ Container	1920 pcs (1540 pcs with 1400 mm rail)

SPECIFICATIONS

Dimensions L x W x H	420 x 300 x 235 mm
Blade Ø	210 mm
Arbor Ø	30 mm
Blade speed	4500 rpm
Max. cut 90°	75 mm
Max. cut 45°	55 mm
Bevel capacity	0 – 45°
Distance-to-wall cut	16 mm
Dust collection Ø inner / outer	35 / 38 mm
Motor	230 – 240 V~
Input	1600 W



EXAMPLES OF USE

Wooden boards



Planks



Laminate / panelling




PRODUCT DETAILS

Cutting depth 90°



Cutting depth 45°



Kompact design



Lightweight

Saw blade
210 mm x 30 mm x 2,4 mm

Idle speed 4500 rpm



PL75

Conventional
hand-held circular saws

The advantage compared with conventional hand-held circular saws is the plunge function. Using this function, specific demands that require plunging the saw blade into the material can be implemented without problems.

Thanks to stepless adjustment, cuts from 0° to 45° are possible. Tilt protection securely keeps the PL75 on the rail at any angle.

45°

