

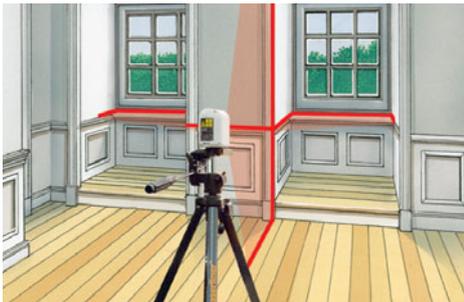


## SmartCross-Laser

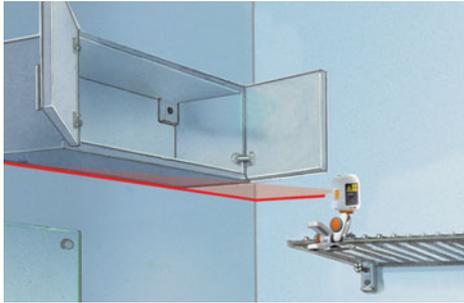

Automatic cross-line laser  
with additional slope function


Rev. 0912

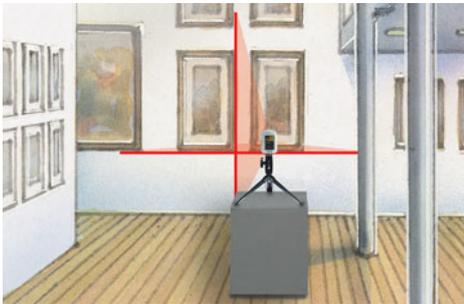

- This unit produces **2 very visible laser lines** which make it outstanding for the alignment of tiles, wall studding, windows, doors, etc.
- **Automatic Level:** automatic alignment by virtue of a magnetic pendulum system.
- **Individually switchable** laser lines
- **Additional slope mode** to align angled surfaces.
- **Out-Of-Level:** is indicated by optical signals when the unit is outside its self-levelling range.
- **Transport Lock:** a pendulum lock protects unit during transport.
- **Simple, uniform operating techniques**

### TECHNICAL DATA

<b>SELF-LEVELLING RANGE</b> ± 5°
<b>ACCURACY</b> ± 0,5 mm / m
<b>OPERATING RANGE</b> (depending on room illumination) 10 m
<b>LASER WAVELENGTH</b> 650 nm
<b>LASER CLASS / LINE LASER OUTPUT POWER</b> 2 / < 1 mW
<b>POWER SUPPLY</b> 2 x 1.5V alkaline batteries (type AA, LR6)
<b>OPERATING TIME</b> 15 hours (alkaline batteries)
<b>OPERATING TEMPERATURE</b> 0°C ... +40°C
<b>STORAGE TEMPERATURE</b> -10°C ... +70°C
<b>DIMENSIONS (W x H x D)</b> 55 x 85 x 75 mm
<b>WEIGHT (incl. batteries)</b> 260 g



Automatic Level



Pendulum can be locked for protection during transport



1/4"-threads



SmartCross-Laser  
+ batteries

Packing dimension (W x H x D)  
125 x 320 x 105

ARTICLE	ARTICLE NO	EAN-CODE	PU
SmartCross-Laser	081.115A	4 021563 684533	5

