



SuperSquare-Laser 4




90° line laser – ideal for laying wall and floor tiles - recycled material is used for sustainability

This 90° line laser projects four highly visible lines and is ideal for laying wall and floor tiles. The attached lay edges and contact surface make it easy to position floor tiles. The special pins allow the device to be securely positioned without damaging surfaces such as finishing coats, carpets, wood and veneers. Integral vials allow the device to be adjusted – these can also be used as a spirit level. The housing of the laser is made from a large proportion of recycled plastic and makes a valuable contribution to sustainability.

- Sustainable design: large proportion of the housing is made from recycled plastic
- The 4 clearly visible laser lines are ideally suited for aligning tiles
- Suitable for use on floors and walls
- The applied lay edges and contact surface make it easy to position floor tiles
- Safe attachment with special pins without damaging surfaces such as finishing coats, carpets, wood, veneered surfaces etc.
- Bubble levels for adjustment
- Can be used as a laser spirit level

TECHNICAL DATA

Vial Accuracy	± 0.5 mm / m
Levelling	manual
Visibility (Typical)*	15 m
Laser Wavelength	635 nm
Laser Class	2 / < 1 mW (EN 60825-1:2014/ A11:2021 / EN 50689:2021)
Power Supply	2 x 1.5V LR6 (AA)
Operating Time	approx. 15 hours
Operating Conditions	0°C ... 50°C, max. humidity 80% rH, no condensation, max. working altitude 4000 m above sea level
Storage Conditions	-10°C ... 70°C, max. humidity 80% rH
Dimensions (W x H x D)	200 mm x 48 mm x 100 mm
Weight	260 g (incl. batteries)

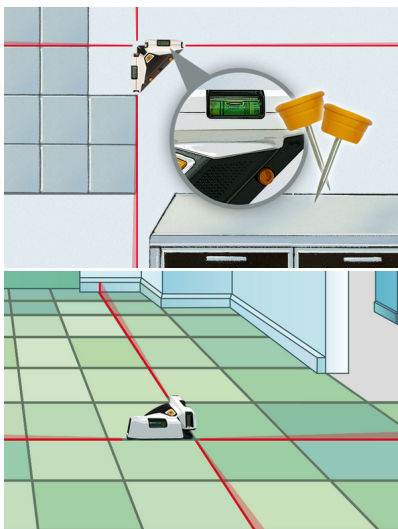

SCOPE OF DELIVERY



Item No. 081.134E GTIN (EAN) 4021563733675 SU 5